

Community Participation

You are invited to participate in our public forum and voice your concerns about your Drinking Water. We meet the first and third Tuesdays of each month, beginning at 6:00 p.m. in the Council Chambers at City Hall, 368 South Commerce Ave. These meetings are televised live on Comcast channel 6, the local Government Access Channel. A copy of the Agenda for upcoming meetings may be requested from the City office by calling (863) 471-5100.

For more information about this report, or for any questions relating to your drinking water, please call Jay Angell, Supervisor of Water Production/Analyst at (863) 471 5113.

Reducing Lead in your Drinking Water

In January 2024, the City of Sebring, in accordance with Guidance for Developing and Maintaining a Service Line Inventory released by the EPA on August 4, 2022, will support water systems in developing and maintaining a service line inventory.


This guidance aims to assist water systems in their efforts to create inventories and provide states with the necessary information for oversight and reporting to the EPA. It contains essential information to help water systems comply with the Lead and Copper Rule Revisions requirement to prepare and maintain an inventory of service line materials by October 16, 2024.

We began doing a survey of the service line connections in our system. Any house built before the lead ban of 1986 may have lead or lead fixtures. The purpose of this survey is to identify the material of service lines on the system side and the customer side of the meter. Going forward, our objective is to remove all lead from the distribution system. We encourage all customers to find out what their service line and plumbing are made from and update them if possible, especially if it is lead or galvanized steel that was installed before the lead ban in 1986.

To date, we have surveyed approximately 4,500 of our 19,500 connections. Our goal is to have all our customers with buildings built prior to 1987 surveyed and lead-free within the next 10 years. If you have any questions, please call the City of Sebring Water Department at (863)-471-5113 or visit us at Mysebring.com/lead



City of Sebring 422 Park
Street Sebring, FL 33870

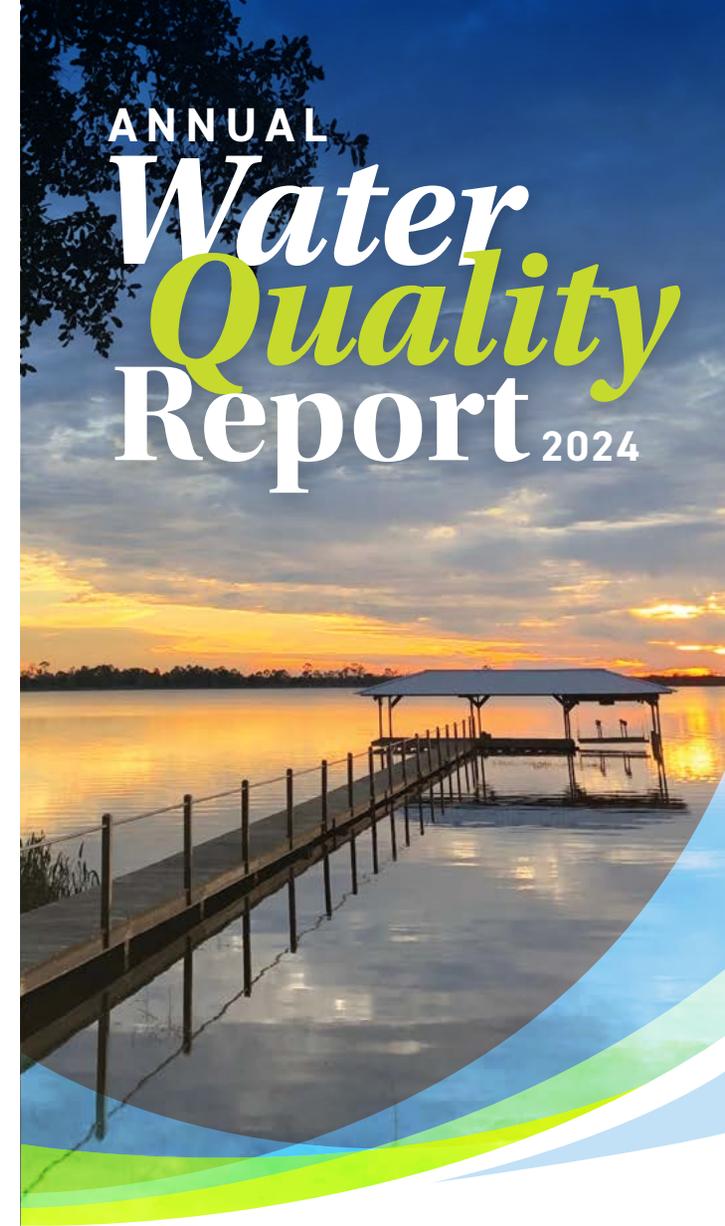

ANNUAL Water Quality Report 2024

Presented By



En Español: Este informe contiene información muy importante sobre su agua potable. Tradúzcalo hable con alguien que lo entienda bien.

PWS ID#: 6280250

Once again we are proud to present our annual drinking water report, covering all drinking water testing performed between January 1 and December 31, 2024. Over the years, we have dedicated ourselves to producing drinking water that meets all state and federal standards. We continually strive to adopt new methods for delivering the best quality drinking water to your homes and businesses. As new challenges to drinking water safety emerge, we remain vigilant in meeting the goals of source water protection, water conservation, and community education while continuing to serve the needs of all of our water users. Please remember that we are always available to assist you, should you ever have any questions or concerns about your water.

Sources of Drinking Water

The sources of drinking water (both tap water and bottled water) include rivers, lakes, streams, ponds, reservoirs, springs, and wells. As water travels over the surface of the land or through the ground, it dissolves naturally-occurring minerals and, in some cases, radioactive material, and can pick up substances resulting from the presence of animals or from human activity. Contaminants that may be present in source water include:

- **Microbial contaminants**, such as viruses and bacteria, which may come from sewage treatment plants, septic systems, agricultural livestock operations, and wildlife.
- **Inorganic contaminants**, such as salts and metals, which can be naturally occurring or results from urban stormwater runoff, industrial or domestic wastewater discharges, oil and gas production, mining, or farming.
- **Pesticides and herbicides**, which may come from a variety of sources such as agriculture, urban stormwater runoff, and residential uses.
- **Organic chemical contaminants**, including synthetic and volatile organic chemicals, which are byproducts of industrial processes and petroleum production, and can also come from gas stations, urban stormwater runoff, and septic systems.
- **Radioactive contaminants**, which can be naturally-occurring or be the result of oil and gas production and mining activities.

All Drinking Water May Contain Contaminants

All drinking water, including bottled water, may reasonably be expected to contain at least small amounts of some contaminants. It is important to

remember that the presence of these contaminants does not necessarily pose a health risk. In order to ensure that tap water is safe to drink, the Environmental Protection Agency (EPA) prescribes regulations which limit the amount of certain contaminants in water provided by public water systems. The Food and Drug Administration regulations establish limits for contaminants in bottled water, which must provide the same protection for public health. Maximum Contaminant Levels are very stringent. To understand the possible health effects described for many regulated constituents, a person would have to drink two liters of water every day at the MCL level for a lifetime to have a one-in-a-million chance of having the described health effects. More information about contaminants and potential health effects can be obtained by calling the EPA's Safe Drinking Water Hotline (1-800-426-4791).

Lead in Home Plumbing

If present, elevated levels of lead can cause serious health problems, especially for pregnant women and young children. Lead in drinking water is primarily from materials and components associated with service lines and home plumbing. We are responsible for providing high-quality drinking water, but cannot control the variety of materials used in plumbing components. When your water has been sitting for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to 2 minutes before using water for drinking or cooking. If you are concerned about lead in your water, you may wish to have your water tested. Information on lead in drinking water, testing methods, and steps you can take to minimize exposure is available from the Safe Drinking Water Hotline or at www.epa.gov/lead.



Where Do We Get Our Drinking Water?

Our primary drinking water supply is from a ground water source called the Floridan Aquifer System. This aquifer is one of the major sources of groundwater in the United States, covering a total area of about 100,000 square miles. It underlies all of Florida, Southern Georgia, and small adjacent parts of Alabama and South Carolina. We have 14 wells placed throughout the system that are used to draw from this ground water source. Our ground water supply is not exposed to air and is not subject to direct pollution and contamination like a river or reservoir. In fact, ground water is the highest quality water available to meet the public health demand of water intended for human consumption. Water is drawn from this aquifer and pumped to storage facilities where it is injected with chlorine for disinfection purposes. Finally, we add a phosphate blend called Sequest-All, which helps to sequester iron deposits and help keep any metal piping like iron, copper, or galvanized lead from corroding. Demand for good, safe drinking water is high. Every day, we provide our customers an average of 4.0 million gallons.

Source Water Assessment - City of Sebring

In 2023, the Department of Environmental Protection performed a Source Water Assessment on our system. The assessment was conducted to provide information about any potential sources of contamination in the vicinity of our wells. There are thirteen potential sources of contamination identified for this system with a Low to Moderate susceptibility level. The assessment results are available on the FDEP Source Water Assessment and Protection Program Web site at <https://fldep.dep.state.fl.us/swapp/> or they can be obtained from Jay Angell, Supervisor of Water Production/Analyst, at (863) 471-5113.

Test Results

The City of Sebring routinely monitors for constituents in your drinking water according to Federal and State laws. The enclosed tables show the results of our monitoring for the period January 1st to December 31st, 2024 and include test results in earlier years for contaminants sampled less often than annually. For contaminants not required to be tested for in 2024, test results are for the most recent testing done in accordance with the regulations.

Radioactive Contaminants

Contaminant (Unit)	Date of Sampling	MCL Violation Y/N	Level Detected	Range of Results	MCLG	MCL	Likely Source of Contamination
Gross Alpha (pCi/L)	2020	No	3.7	1.3 - 3.7	0	15	Erosion of natural deposits
Radium 226 (pCi/L)	2020	No	1.9	0.4 - 1.9	0	5	Erosion of natural deposits
Radium 228 (pCi/L)	2020	No	0.7	0.6 - 0.7	0	5	Erosion of natural deposits

Inorganic Contaminants

Contaminant (Unit)	Date of Sampling	MCL Violation Y/N	Level Detected	Range of Results	MCLG	MCL	Likely Source of Contamination
Arsenic (ppb)	08/10/2023	No	0.00069	ND-0.00069	0	0.010 mg/L	It enters drinking water supplies from natural deposits in the earth or from agricultural and industrial practices.
Barium (ppm)	08/10/2023	No	0.0625	0.0264 - 0.195	2	2	Discharge of drilling wastes; from metal refineries; & erosion of natural deposits
Fluoride (ppm)	8/10/2023	No	0.4163	0.079 - 0.69	4	4.0	Erosion of natural deposits; discharge from fertilizer and aluminum factories; water additive that promotes strong teeth when at optimal levels between 0.7 and 1.3 ppm
Mercury (ppb)	8/10/2023	No	0.00009	ND-0.00009	0	0.002 mg/L	It usually gets into water as a result of improper waste disposal.
Sodium (ppm)	8/10/2023	No	11.8857	7.6 - 17.8	NA	160	Salt water intrusion, leaching from soil

Synthetic Organic Contaminants

Contaminant (Unit)	Date of Sampling	MCL Violation Y/N	Level Detected	Range of Results	MCLG	MCL	Likely Source of Contamination
Dalapon (ppb)	Quarterly 2024	No	0.75	0.68 - 0.81	0	0.2 mg/L	It may get into drinking water after application to control grasses in crops, drainage ditches and along railroads.

Stage 2 Disinfectants and Disinfection By-Products

Contaminant (Unit)	Date of Sampling	MCL Violation Y/N	Level Detected	Range of Results	MCLG or MRDL	GMCL or MRDL	Likely Source of Contamination
Chlorine (ppm)	Monthly 2024	No	1.34	1.18 - 1.63	4	4	Water additive used to control microbes
Haloacetic Acids (five) [HAA5] (ppb)	Quarterly 2024	No	12.5625	8.0 - 20.6	NA	60	By-product of drinking water disinfection
THM [Total trihalomethanes] (ppb)	Quarterly 2024	No	37.275	27.2 - 47.4	NA	80	By-product of drinking water disinfection

Volatile Organic Contaminants

Toluene	11/30/2023	No	0.46	ND-0.46	NA	1.0	This organic chemical is used as a solvent and in the manufacture of gasoline for airplane.
---------	------------	----	------	---------	----	-----	---

Lead and Copper (Tap Water)

Contaminant (Unit)	Date of Sampling	AL Exceedance Y/N	90th Percentile Result	No. of Sampling Sites Exceeding the AL	Range of Results	MCLG	AL (Action Level)	Likely Source of Contamination
Copper [tap water] (ppm)	9/13/2023-9/27/2023	No	0.17	0	0.0020 - 0.31	1.3	1.3	Corrosion of household plumbing systems; erosion of natural deposits; leaching from wood preservatives
Lead [tap water] (ppb)	9/13/2023-9/27/2023	No	0.0009	0	U - 0.0020	0	15	Corrosion of household plumbing systems, erosion of natural deposits

UCMR4

Contaminant (Unit)	Date of Sampling	Level Detected (Average)	Range of Results	Likely source of Contamination
Manganese (ppb)	6/19/20	3.75	0.9-10.2	Natural occurrence from soil leaching
Total Organic Carbon (ppm)	7/2/20	1.13717	0.625-3.05	Naturally present in the environment
Bromide (ppm)	7/11/20-7/14/20	40.55	6.7-70.6	Naturally present in the environment
HAA5 (ppb)	6/24/20	20.73	9.6-29.9	By-product of drinking water disinfection
HAA6BR (ppb)	6/24/20	8.4	7.1-11.4	By-product of drinking water disinfection
HAA9 (ppb)	6/24/20	27.9	15.7-36.7	By-product of drinking water disinfection

Unregulated contaminants are those for which EPA has not established drinking water standards. The purpose of unregulated contaminant monitoring is to assist EPA in determining the occurrence of unregulated contaminants in drinking water and whether future regulation is warranted. For additional information call the Safe Drinking Water Hotline at (800) 426-4791.

DEFINITIONS

In the tables above, you may find many terms and abbreviations you are not familiar with. To help you better understand these terms we've provided the following definitions:

90TH PERCENTILE: The levels reported for lead and copper represent the 90th percentile of the total number of sites tested. A percentile is a value on a scale of

AL (ACTION LEVEL): The concentration of a contaminant which, if exceeded, triggers treatment or other requirements which a water system must follow.

MCL (MAXIMUM CONTAMINANT LEVEL): The highest level of a contaminant that is allowed in drinking water. MCLs are set as close to the MCLGs as feasible using the best available treatment technology.

MCLG (MAXIMUM CONTAMINANT LEVEL GOAL): The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs allow for a margin of safety.

MRDL (MAXIMUM RESIDUAL DISINFECTANT LEVEL): The highest level of a disinfectant allowed in drinking water. There is convincing evidence that addition of a disinfectant is necessary for control of microbial contaminants.

MRDLG (MAXIMUM RESIDUAL DISINFECTANT LEVEL GOAL): The level of a drinking water disinfectant below which there is no known or expected risk to health. MRDLGs do not reflect the benefits of the use of disinfectants to control microbial contaminants.

MCL (MAXIMUM CONTAMINANT LEVEL): The highest level of a contaminant that is allowed in drinking water. MCLs are set as close to the MCLGs as feasible using the best available treatment technology.

MCLG (MAXIMUM CONTAMINANT LEVEL GOAL): The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs allow for a margin of safety.

MRDL (MAXIMUM RESIDUAL DISINFECTANT LEVEL): The highest level of a disinfectant allowed in drinking water. There is convincing evidence that addition of a disinfectant is necessary for control of microbial contaminants.

MRDLG (MAXIMUM RESIDUAL DISINFECTANT LEVEL GOAL): The level of a drinking water disinfectant below which there is no known or expected risk to health. MRDLGs do not reflect the benefits of the use of disinfectants to control microbial contaminants.



Important Health Information

The EPA has determined that your water is safe for most people at the MCL level. Some people may be more vulnerable to contaminants in drinking water than the general population. Immuno-compromised persons such as persons with cancer who are undergoing chemotherapy, persons who have undergone organ transplants, people with HIV/AIDS or other immune system disorders, some elderly and infants can be particularly at risk from infections. These people should seek advice about drinking water from their health care providers. Environmental Protection Agency and the Center for Disease Control guidelines are appropriate means to lessen the risk of infection by cryptosporidium and other microbiological contaminants. These guidelines are available from the Safe Drinking Water Hotline (800-426-4791).

Unregulated Contaminant Monitoring Regulation

We monitored for a specific list of Unregulated Contaminants (UCs) during the time period of 2015 – 2020 as part of a study to help the US Environmental Protection Agency (EPA) determine the occurrence in drinking water of UCs and whether or not these contaminants need to be regulated. At present, no health standards (for example, maximum contaminant levels) or likely sources have been established for UCs. However, we are required to publish the detected analytical results of our UC monitoring in our annual water quality report. For the complete list of results, including the non-detected contaminants, contact Jay Angell at (863) 471-5113. If you would like more information on the EPA's Unregulated Contaminants Monitoring Rule, please call the Safe Drinking Water Hotline at (800) 426-4791.